

The fencing will be installed in two separate areas. The support for the fence shall be treated 4X4's installed at each end of the 8 foot panels. The side area shall be Classic Gothic or equal and approximately 152 feet. The front shall be Deluxe Classic Gothic or equal and approximately 80 feet.

The contractor must visit the site and determine all site conditions. The county reserves the right to reject any and all bids, to waive informalities and technicalities and award any bid considered to be in the best interests of the county. The county reserves the right to increase or decrease quantities twenty percent (20%).

Front – 80 Ft. - \_\_\_\_\_ per 8 ft section      Total 80 ft \_\_\_\_\_

Side – 152 Ft. \_\_\_\_\_ per ft section      Total 152 ft \_\_\_\_\_

Installation including labor, materials and all other cost to complete \_\_\_\_\_

Total Bid Amount \_\_\_\_\_

Date \_\_\_\_\_

Authorized Signature \_\_\_\_\_


Company \_\_\_\_\_



To Contact a Barrette Outdoor Living/Freedom™  
Specialist Call 888-418-4400 Fax 440-891-5265

Fence Panels and Posts Use SOS# 889  
Gates and Accessories Use SOS# 1893


# Pre-Built Fence Project Calculator

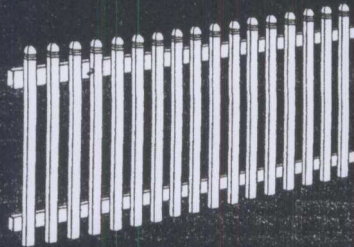

Number of panels	8	11	14	17	20	23	26
Posts	9	12	15	18	21	24	27
Post Tops	9	12	15	18	21	24	27
Heavy-Duty Rail Brackets	32	44	56	68	80	92	104
Bags of Screws	5	6	8	10	11	13	14
Tubes of Cement	1	2	2	2	3	3	3
Bags of Concrete (80#)	18	24	30	36	42	48	54
Bags of Pea Gravel	5	6	8	9	11	12	14

All calculations are approximate

**Heavy-Duty  
Brackets**



**Screws**



**Cement**

